

Designed for use in intra-building sites, the **AL 933** swing gate facilitates the passage of people with reduced mobility (*wheelchair users, service staff with trolleys, bulky equipment, etc.*) as well as the evacuation of the building in an emergency.

Its discreet design makes it particularly suitable for access control in prestigious access areas.

Since the gate is bi-directional, the obstacle opens in the user's direction of passage.

Possible configurations:

- alone, facing a wall or a guardrail,
- facing each other (*independent operation*),
- facing each other (*simultaneous operation*),
- in conjunction with security entrance lanes or turnstiles.

## DESCRIPTION

1. Steel central pillar with RoHS anti-corrosion zinc plating treatment, fixed to the floor by means of an adjustable base allowing easy levelling.
2. Passage obstacle in 10mm clear toughened glass.
3. AISI 304 brushed stainless steel, folded and welded panels for easy access to the electromechanical unit and the control logic unit.
4. Electromechanical drive for operation of the obstacle, consisting of:
  - a brushless motor coupled to a planetary gearbox;
  - an encoder;
  - a power supply board controlled by the control logic unit.
5. Electronic control logic using the ARM Cortex A8 technology and the Linux operating system, for advanced system control. A built-in Web server accessible from any standard Web browser, provides a simple interface for configuration of the gate's functional parameters and a complete diagnostics and maintenance tool.  
The maintenance interface is common to multiple Automatic Systems products and greatly facilitates product maintenance.
6. Data transfer with the outside world via the XML-RPC protocol over an Ethernet interface.  
The AccessLane can also be controlled from the Smart & Slim operator console.
7. Data transfer by dry contacts: passage authorisation, passage data, fraud, technical defect, etc.
8. Function pictograms indicating gate and passage status to the user.
9. Available in version complying with DAS requirements (*NF S 61937*) according to PV: XXXX with use of the remote control input per break: 24VDC (-15%, +20%), 5.1mA.

## OPERATION

The gate is activated by an impulse from an access control system such as a push-button, a motion detector or a card reader installed on a support post, or from a remote program selector located in the reception area.

After passage authorisation, the gate opens automatically (*in the user's direction*) or by means of a light push, depending on the selected mode. The opening angle is adjustable. The obstacle remains open and closes automatically after a pre-set time.

The opening and closing speeds can be adjusted to meet local requirements.

If the gate is obstructed while rotating, it will stop immediately and make successive attempts to complete the cycle.

If the last attempt is still unsuccessful, the timeout between two attempts will be increased to prevent overheating and the system will be restarted as soon as possible.

A Fire Detection command enables immediate opening of the gate (*selectable direction of opening*).

In case of a power failure, the gate unlocks and can be opened by a light push.

## STANDARD TECHNICAL CHARACTERISTICS

Power supply	Single phase 110 VAC (1A)-240 VAC (0.5A) (+/- 10%) - 50/60 Hz + Ground. Note: not to be connected to a floating network or to a high impedance earthed industrial distribution network.
Power consumption	15 W during operation (< 10 W at rest)
Peak current	< 1 A
Leakage current	< 3.5 mA
Motor	24 VDC - output power 30 W.
Free passage [L]	900 mm
Min. opening/closing time	4 sec. (depending on the access control system reactivity and the user speed)
Operating temperature	-10° to +50°C
Relative humidity	< 95%, without condensation
MCBF	1.000.000 cycles between failures, in compliance with recommended maintenance
Sound level	55 dB at 1m
Weight	55 kg (without obstacle)
Protection rating	IP44 (Std) et IP42 (DAS-certified version)
CE	Complies with European standards

## OPTIONS

- Obstacle height: 900 or 1200 mm from the ground..
- Obstacle for passage width 1050 or 1250 mm.
- Escape route button per EN 13637 norm, to be installed on a wall.
- Support post for integration of customer peripheral equipment.
- Support post with push-button (*for free entrance or exit*).
- Support post with escape route button per EN 13637 norm.
- Support post with motion detector.
- Post with reader support on request.
- Monitoring panel.
- Personalised logo sticker (*sanded*).
- Master/Slave configuration.
- Outdoor version (IP54 & stainless steel 316L) with a 1200mm roll bar\*.

\* an outdoor version (IP54 & stainless steel 316L) with a shorter length of the roll bar is possible, please contact us for feasibility


**Note:** for restrictions on options, refer to the pricelist.

## WORK TO BE PROVIDED BY THE CUSTOMER

- Floor mounting.
- Power supply.
- Wiring between lanes of a single group.
- Wiring to external peripheral equipment, if any.
- Integration of accessories.

**Note:** Please follow the installation plan.


## STANDARD DIMENSIONS (MM)

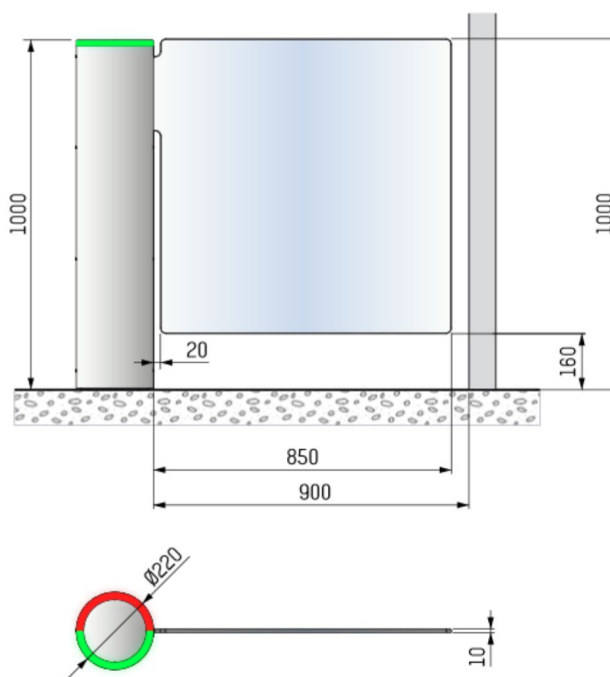

## TUBULAR OBSTACLE (OPTION)



Dimensions (mm)

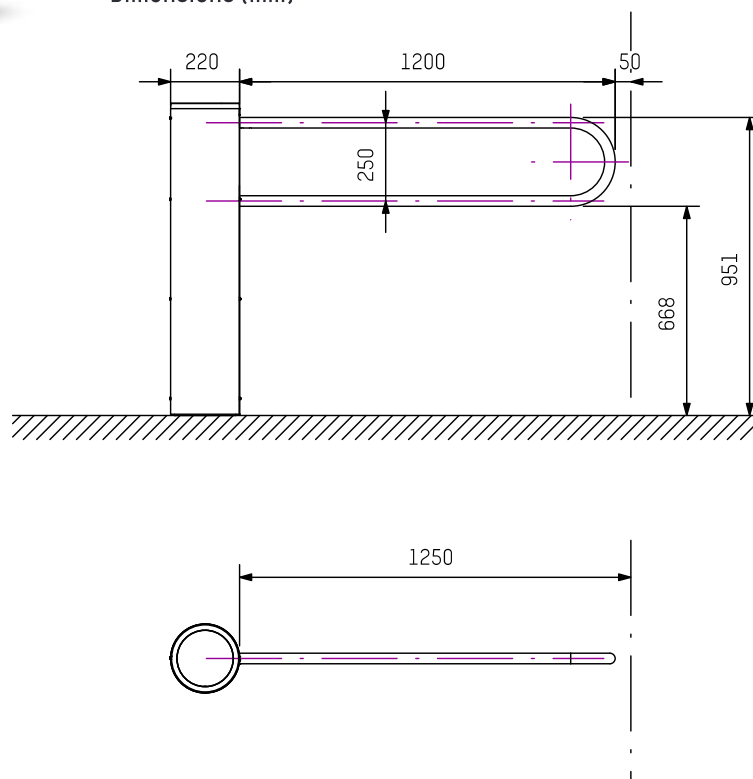

## Headquarters

Avenue Mercator, 5  
1300 Wavre - Belgium



✉ [helpdesk.as@automatic-systems.com](mailto:helpdesk.as@automatic-systems.com)



☎ +32.(0)10.23.02.11



🌐 [www.automatic-systems.com](http://www.automatic-systems.com)



